2.7" (Color) Front Light Panel

12380-xx | Product Data Sheet | 2020



Overview

The **FLEx Front Light Panel** optical film is designed to laminate to the front surface of **JDI reflective display (LPM027M128B)** to provide high quality on-demand display lighting. This thin plastic panel incorporates only a single LED which enables product designers to develop ultra-thin devices and minimize battery use.

- One low-power LED (included in Front Light)
- Over 80x less power compared to traditional backlighting
- 0.05 mm thick FLEx film is over **5x thinner** than alternative lightguides
- Simple I/F and Connectivity to System Board


For more information:


WEB flexlighting.com

CONTACT flexlighting.com/contact

PHONE 773-295-0305

Mechanical

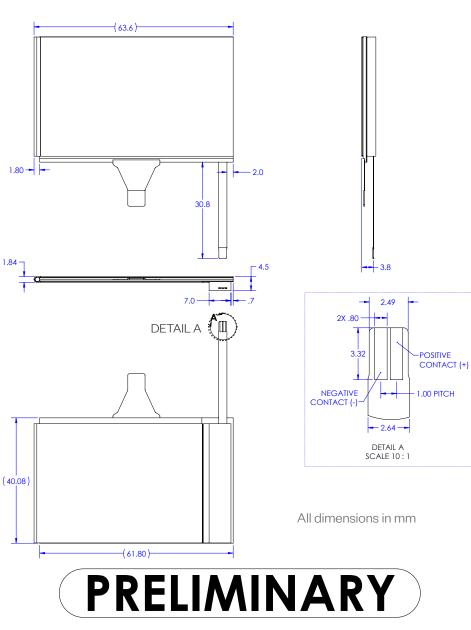

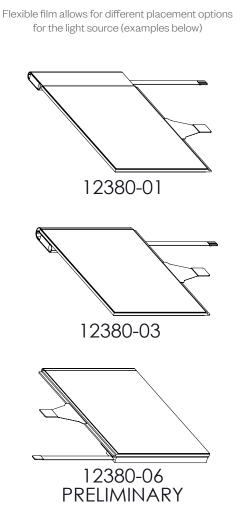


2.7" (Color) Front Light Panel


12380-xx | Product Data Sheet | 2020



Electrical

ltem	Symbol	Typical	Absolute Max	Unit
Forward Current	l _F	5	25	mA
Pulse Forward Current	l _{FP}		80	mA
Reverse Voltage	$V_{_{\mathrm{R}}}$	-	5	V

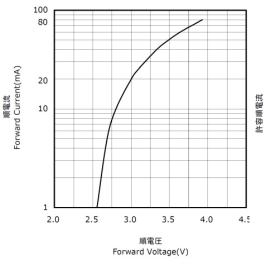

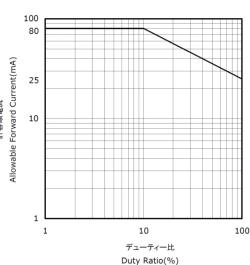


For more information: WEB flexlighting.com CONTACT flexlighting.com/contact PHONE 773-295-0305


Example ZIF Connectors:

- Molex 503480-0400
- Molex 52745-0497
- Molex 54550-0471
- Molex 54548-0471 (bottom)
- Molex 505110-0492


Optical

2.7" JDI + Front Light (12380-xx)								
Item		Symbol	TYP.	Unit	Remark			
Viewing Angle CR >2	V	Θ 11 Θ 12	65 65	° (Degree)	[Remark 1]			
	Н	Θ 21 Θ 22	30 40	° (Degree)				
Contrast Ratio	Front light ON	CR	14		[Remark 2]			

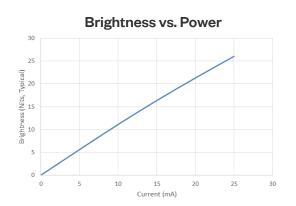



Remark 1: Viewing Angle



Remark 2: Definition of Contrast Ratio

 $\text{Contrast Ratio (CR)} = \frac{\text{Reflection intensity in white display}}{\text{Reflection intensity in black display}}$